




2 Rollers

series Impact

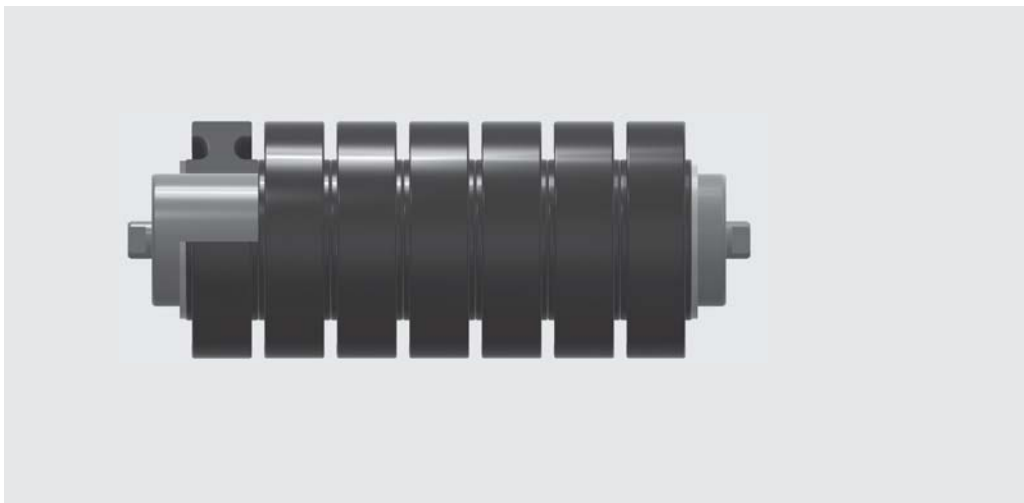

Øe 133 NA

Base roller:

PSV/1-FHD

D = 89;
spindle 20; d₁ = 20
bearing 6204
ch = 14

PSV/4-FHD

D = 89;
spindle 30; d₁ = 30
bearing 6206
ch = 22

PSV/2-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6205
ch = 18

PSV/5-FHD

D = 89 x 4*;
spindle 30; d₁ = 30
bearing 6306
ch = 22

PSV/3-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6305
ch = 18

* biggertubethickness
than standard

Example of ordering
standard design
PSV/2-FHD,25F,133NA,388

for special designs
see pages 80-81

| belt width mm | roller dimensions mm | | | | | weight Kg | | | | | rings width | |
|---------------------|----------------------------|------|---|---|------|--------------|-----------|-----------|-----------|-----------|----------------|-----------|
| | arrangements | | | B | C | A | PSV/1-FHD | PSV/2-FHD | PSV/3-FHD | PSV/4-FHD | | PSV/5-FHD |
| | | | | | | | | | | | | E = 35 |
| 500 | 200 | 208 | * | | 3.7 | | | | | | | |
| 650 | 250 | 258 | * | | 4.5 | 5.1 | | | | | | |
| 500 800 | 315 | 323 | * | | 5.6 | 6.2 | 6.5 | 7.3 | 7.9 | | | |
| 650 1000 | 380 | 388 | * | | 6.6 | 7.3 | 7.7 | 8.5 | 9.1 | | | |
| 800 1200 | 465 | 473 | * | | 7.8 | 8.6 | 8.9 | 9.9 | 10.5 | | | |
| 1400 | 530 | 538 | * | | 8.8 | 9.7 | 10.1 | 11.2 | 11.8 | | | |
| 500 1000 1600 | 600 | 608 | * | | 10.1 | 11.1 | 11.4 | 12.7 | 13.3 | | | |
| 1800 | 670 | 678 | * | | | 12.2 | 12.6 | 13.9 | 14.5 | | | |
| 1200 | 700 | 708 | * | | 11.4 | 12.6 | 12.9 | 14.3 | 14.9 | | | |
| 650 2000 | 750 | 758 | * | | 12.3 | 13.5 | 13.9 | 15.3 | 15.9 | | | |
| 1400 | 800 | 808 | * | | 12.9 | 14.2 | 14.6 | 16.2 | 16.4 | | | |
| 1600 | 900 | 908 | * | | 14.5 | 15.9 | 16.3 | 18.0 | 18.6 | | | |
| 800 | 950 | 958 | * | | 14.6 | 17.1 | 17.5 | 19.3 | 19.9 | | | |
| 1800 | 1000 | 1008 | * | | | 18.2 | 18.4 | 20.1 | 20.7 | | | |
| 2000 | 1100 | 1108 | * | | | | 19.8 | 21.7 | 22.3 | | | |
| 1000 | 1150 | 1158 | * | | 18.7 | 20.5 | 20.8 | 23.0 | 23.6 | | | |
| 1200 | 1400 | 1408 | * | | 22.4 | 24.6 | 24.9 | 27.5 | 28.1 | | | |
| 1400 | 1600 | 1608 | * | | 25.5 | 27.9 | 28.3 | 31.2 | 31.8 | | | |
| 1600 | 1800 | 1808 | * | | 28.0 | 30.7 | 31.0 | 34.3 | 34.9 | | | |
| 1800 | 2000 | 2008 | * | | | 34.0 | 34.4 | 38.0 | 38.6 | | | |
| 2000 | 2200 | 2208 | * | | | | 37.5 | 41.5 | 42.1 | | | |

* in relation to the choice of base roller