




2 Rollers

series Impact

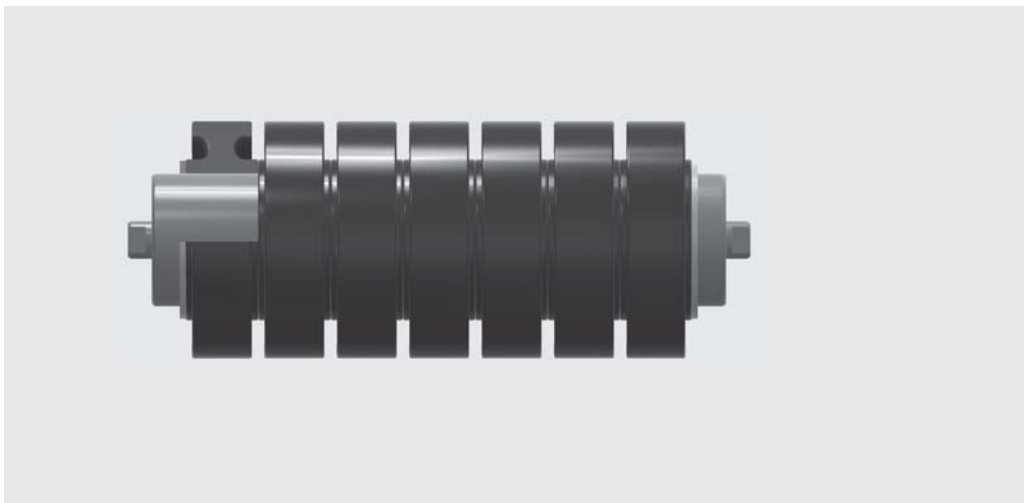

Øe 133 NA

Base roller:

PSV/1-FHD

D = 89;
spindle 20; d₁ = 20
bearing 6204
ch = 14

PSV/4-FHD

D = 89;
spindle 30; d₁ = 30
bearing 6206
ch = 22

PSV/2-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6205
ch = 18

PSV/5-FHD

D = 89 x 4*;
spindle 30; d₁ = 30
bearing 6306
ch = 22

PSV/3-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6305
ch = 18

* biggertubethickness
than standard

Example of ordering
standard design
PSV/2-FHD,25F,133NA,388

for special designs
see pages 80-81

belt width mm	roller					weight Kg	rings width		
	dimensions mm			arrangements					
	B	C	A	PSV/1-FHD	PSV/2-FHD	PSV/3-FHD	PSV/4-FHD	PSV/5-FHD	E = 35
500	200	208	*	3.7					
650	250	258	*	4.5	5.1				
500 800	315	323	*	5.6	6.2	6.5	7.3	7.9	
650 1000	380	388	*	6.6	7.3	7.7	8.5	9.1	
800 1200	465	473	*	7.8	8.6	8.9	9.9	10.5	
1400	530	538	*	8.8	9.7	10.1	11.2	11.8	
500 1000 1600	600	608	*	10.1	11.1	11.4	12.7	13.3	
1800	670	678	*		12.2	12.6	13.9	14.5	
1200	700	708	*	11.4	12.6	12.9	14.3	14.9	
650 2000	750	758	*	12.3	13.5	13.9	15.3	15.9	
1400	800	808	*	12.9	14.2	14.6	16.2	16.4	
1600	900	908	*	14.5	15.9	16.3	18.0	18.6	
800	950	958	*	14.6	17.1	17.5	19.3	19.9	
1800	1000	1008	*		18.2	18.4	20.1	20.7	
2000	1100	1108	*			19.8	21.7	22.3	
1000	1150	1158	*	18.7	20.5	20.8	23.0	23.6	
1200	1400	1408	*	22.4	24.6	24.9	27.5	28.1	
1400	1600	1608	*	25.5	27.9	28.3	31.2	31.8	
1600	1800	1808	*	28.0	30.7	31.0	34.3	34.9	
1800	2000	2008	*		34.0	34.4	38.0	38.6	
2000	2200	2208	*			37.5	41.5	42.1	

* in relation to the choice of base roller